## MOEN®

### Specifications

#### DESCRIPTION

- · Versatile, hands-free convenience in the kitchen
- Optimized cleaning force with PowerClean<sup>™</sup>
- Allows users to control the faucet in 2 unique ways: Wave Sensor and familiar handle
- Powered by 6 AA batteries or optional AC adapter with power splitter
- High arc spout provides height and reach to fill or clean large pots while pull down wand provides the maneuverability for cleaning or rinsing
- Reflex<sup>™</sup> pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with various finishes identified by suffix
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- Quick connect installation Duralock™
- Faucet designed for handle to be mounted on right side

#### **OPERATION**

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position

#### **FLOW**

• Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

#### CARTRIDGE

• 1255<sup>™</sup> Duralast<sup>™</sup> cartridge for Single-Handle Faucets


#### **STANDARDS**

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking
  Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🛃 for lever handle

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations



Align™ *MotionSense Wave*™ Single Handle High Arc Pulldown Kitchen Faucet

#### Models: 7565EW series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 OR 3 HOLES, 1-1/2" (38mm) MIN. DIA.




See pages 2 and 3 for dimensions

PC16354

4/12/2022 teleased 00

# MOEN®

### Specifications

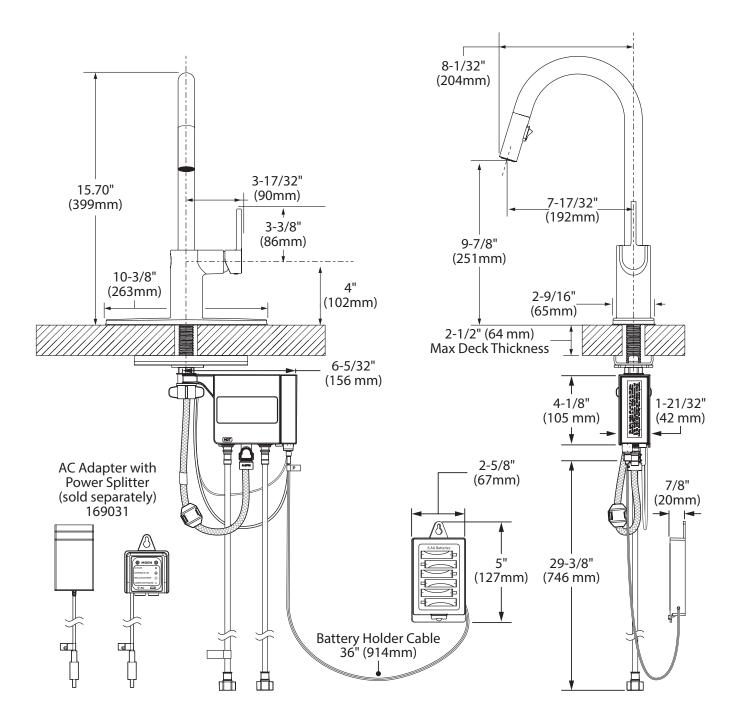


(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

# MOEN®

### Specifications

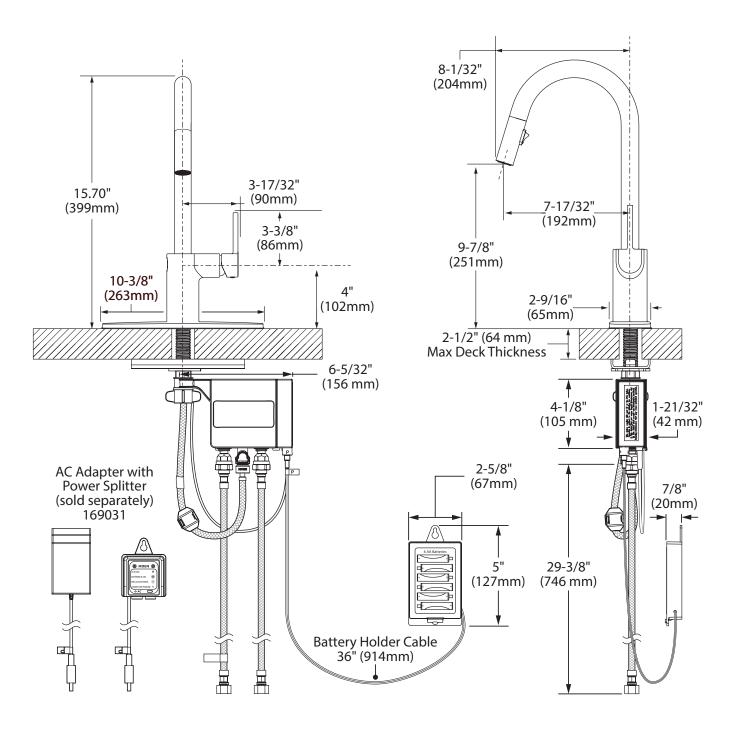

**CRITICAL DIMENSIONS** 

(DO NOT SCALE)

SPC1654 5000041325

04/12/2022 Seleased 00